


HHK 20A Hydraulic Impact Hammer

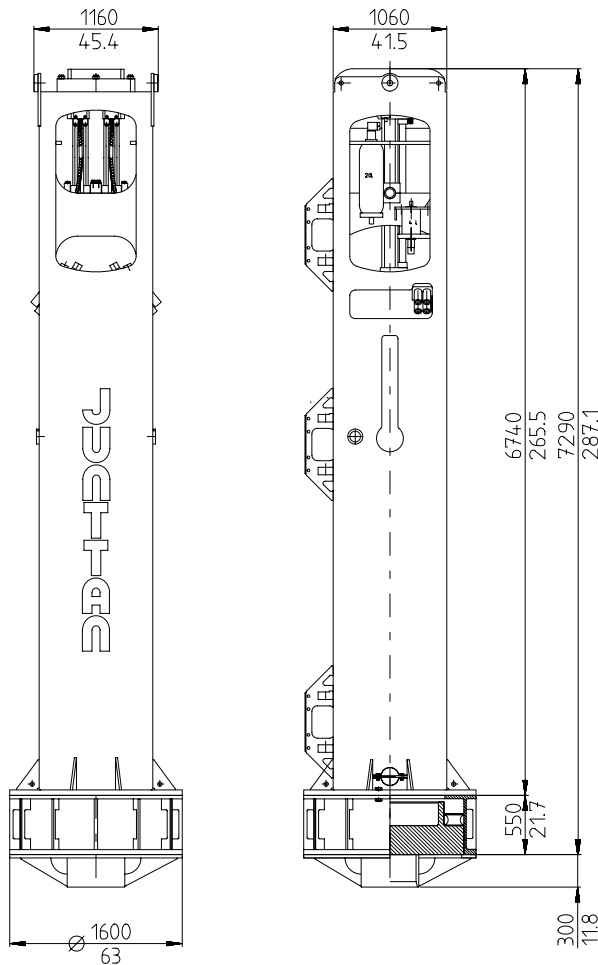

JUNTTAN HHK 20A		
Max. energy	kNm (ft-lbs)	235 (173 600)
Drop height	mm (inch)	50 - 1200 (2 - 47.2)
Blows per minute		40 - 100
Ram weight	kg (lb)	20 000 (44 090)
Total weight including A-type drive cap	kg (lb)	30 500 (67 240)
Oil flow	l/min (gpm)	1220 (322.3)
Operating pressure	bar (PSI)	260 (3 770)
Hoses - pressure line	mm (inch)	2 x 38 (1 ½)
- return line		2 x 38 (1 ½)
Drive cap types		A for metal tubes B for concrete piles
Drive cap max. inner diameter	mm (inch)	A: Ø 1320 (51.97) B: Ø 1320 (51.97)
Larger drive cap diameters available on special request		
Suitable power packs		20 CCU - 30 CCU
Optional equipment		
<ul style="list-style-type: none"> guide claws energy measurement device 	<ul style="list-style-type: none"> additional drive caps pile sleeves lifting cat 	<ul style="list-style-type: none"> power packs additional noise insulation package

Junttan Oy reserves the right to amend the specification without prior notice. Error and misprints reserved. 3 March 2005 - version M1HHK20A001.