


JPack 30CCU Hydraulic Power Pack

The Jpack 30CCU is hydraulic power pack especially designed to be used with hammers. Environmentally friendly features in Junttan Jpacks include sound proof housing and the possibility to use biodegradable oil in the hydraulic system. The filtering degree of return filters is about 5 µm. The new efficient diesel engine complies with U.S. EPA Tier1 exhaust gas norms.

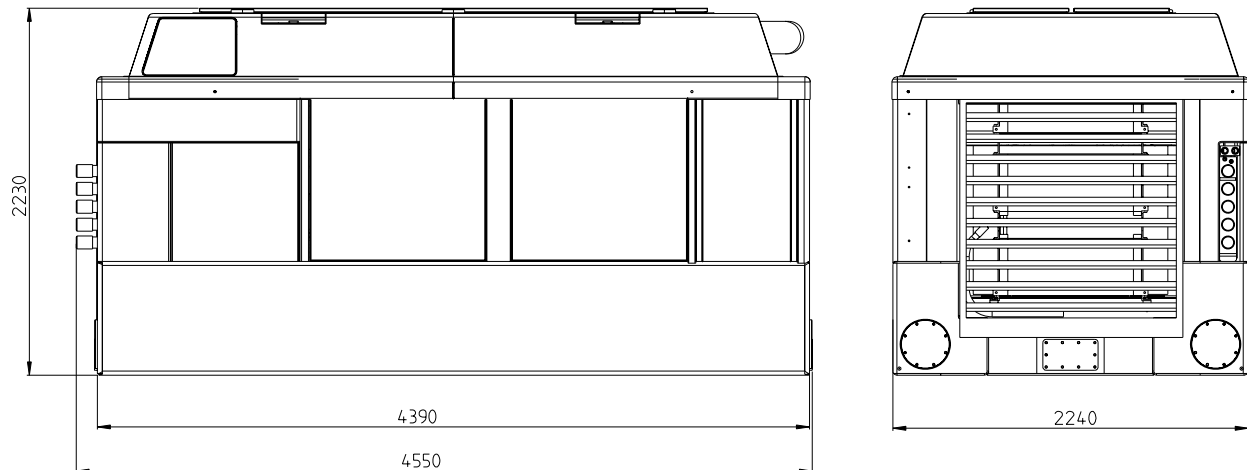

JUNTTAN JPack 30CCU		
Engine type		Cummins QSK23
Engine output	kW (hp)	708(950) @2100 rpm
Pump type	Axial piston	2 x A11VLO260HD2
Pump pressure max.	bar (PSI)	350 (5076)
Pump oil flow max. at 2100 rpm	l/min (gal/m)	2 x 546 = 1092 (2 x 144 = 288)
Fuel capacity	l (gal)	2500 (660)
Hydraulic oil capacity	l (gal)	2700 (713)
Weight	kg (lb)	13 500 (29 760)
Suitable Junttan hammers		
• HHK S-series hammer	HHK 25S	
• Other Junttan hammers	Models with two cylinders	

Junttan Oy reserves the right to amend the specification without prior notice. Error and misprints reserved. 11 October 2006 - version MJPack30CCU001.