


JPack 15 CCU Hydraulic Power Pack

Junttan Jpacks are hydraulic power packs designed to be used with hammers, rotary heads and vibrators. Environmentally friendly features in Junttan Jpacks include sound proof housing and the possibility to use biodegradable oil in the hydraulic system. The filtering degree of return filters is about 10 µm. The new efficient diesel engines comply with EPA/CARB Stage 2 and NRMM Tier2 exhaust gas norms.

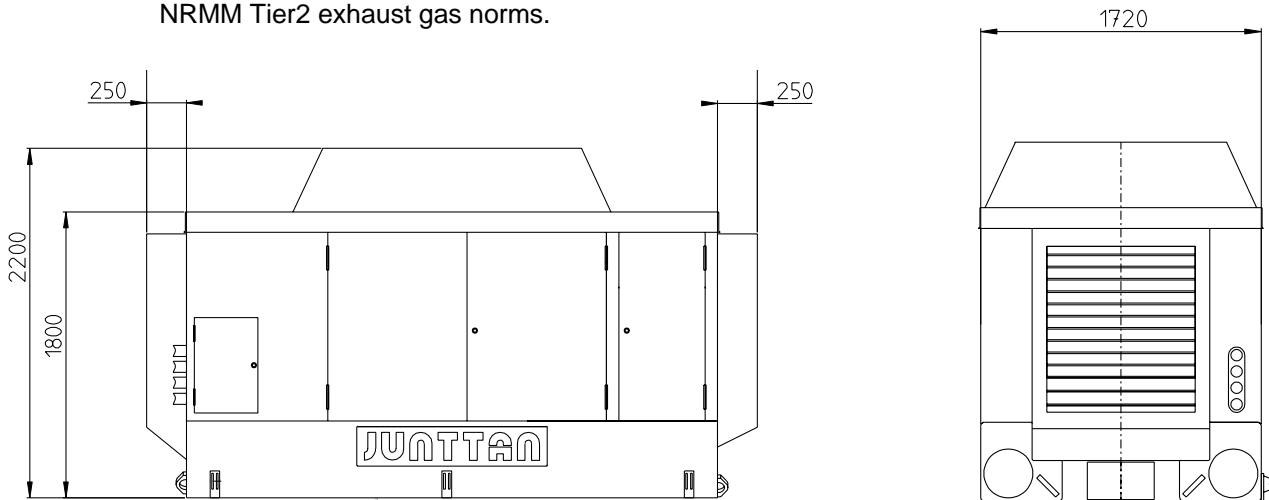

JUNTTAN JPack 15 CCU		
Engine type		Cummins QSM11
Engine output	kW (hp)	298 (400)
Pump type	Axial piston	2 x A11VO190LR
Pump pressure max.	bar (PSI)	350 (5076)
Pump oil flow max.at 2000 rpm	l/min (gal/m)	2 x 380 (2 x 100)
Fuel capacity	l (gal)	700 (185)
Hydraulic oil capacity	l (gal)	1300 (343)
Weight	kg (US ton)	8 400 (9 240)
Suitable Junttan hammers and rotary heads		
• HHK –hammers	HHK 3 – HHK 16	
• HHK A-series hammers	HHK 3A – HHK 18A	
• HHK S-series hammers	HHK 4S – HHK 16S	
• Other Junttan hammers	HHK 3AL – HHK 5AL HHS 3, HHS 9 HHHK 5A – HHHK 7A	
• Junttan rotary heads		

Junttan Oy reserves the right to amend the specification without prior notice. Error and misprints reserved. July 12, 2005 - version MJPack15CCU001.